

Assembled sensor with Digital output for Conductivity



Conductivity Checker
SE-Cond-D

- Easy to replace the electrode
No need of any tool when replace.



Applications



Natural environment



Wastewater


Conductivity Checker

SE-Cond-D

Specifications

Model	SE-Cond-D
Measurement parameter	Conductivity
Measurement range	0.00 to 10.00 mS/cm 0.000 to 1.000 S/m 0.0 to 30 g/L
Display resolution	0.01 mS/cm 0.001 S/m 0.1 g/L
Power input	6 ~ 40 VDC
Current consumption	Less than 7 mA
Communications	MODBUS
Operating temp.	0 ~ 60°C (unfrozen)
Dimensions	Φ52 x 297 mm
Weight	0.53 kg
Cable length	6 m
Main material	PPS

Dimensions

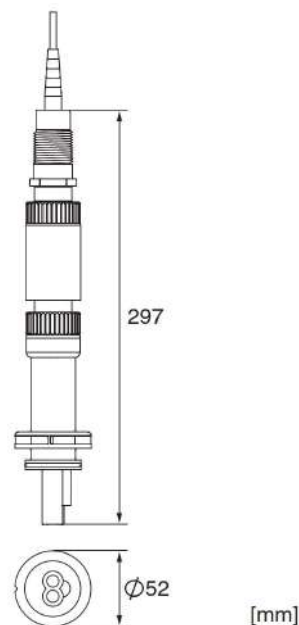

OPTEX sensors line-up

Turbidity
TC-3000-D



Turbidity
TSC-10-D



Suspended solids
TS-1000-D



Suspended solids
TS-Mx-D



Color and Turbidity
TDC-Mi



Dissolved oxygen
DOS-20



pH
SE-pH-D



ORP
SE-ORP-D



Optional items

Universal transmitter : SC-U1(E)

- 2 sensors can be installed.
(max. 4 sensors can be installed using the expansion board)
- 4-20 mA output
- Relay output



Replacement electrode: SE-Cond-EL (for SE-Cond-D)



●The appearance and specifications are subject to change for improvement without prior notice. ●The colors might be slightly different from the actual products. ●Safety Precautions: Read the instructions manual carefully and thoroughly before using the appliance, and then use it correctly. ●The products have a limited life. Maintenance and replace it regularly.

OPTEX PINNACLE INDIA PVT. LTD.

FF-11, Paras Downtown Center, Sector 53,
Golf Course Road, Gurgaon, Haryana - 122002
Tel.+91-124-4035708, +91-9899701401
<http://www.optexpinnacle.com>
Email: p-verma@optex.in

OPTEX CO., LTD.

5-8-12, Ogoto, Otsu, Shiga, 520-0101 Japan
Tel.+81-77-579-8680 Fax.+81-77-579-8199
<http://www.optex.co.jp/env/eng/>