

Measure turbidity to four decimal places.
It enables you to monitor the quality of water
which is good to drink or not.



Ultra Low Turbidity Checker

TC-Mi

For managers at beverage waterworks and water purification plants.
TC-Mi provides you with easy and accurate water quality management!

Easy installation

The compact design containing a deforming enables you to install easily.

Maintenance cost reduction

A LED light source eliminates the need for replacement.

High measurement accuracy

The condensation prevention function maintains a stable measurement.

Applications

Scene 1

Water intake management

Manage raw water from rivers and wells

Scene 2


Detect membrane breakage

Monitor the condition of the membrane unit and detect membrane breakage

Scene 3

Clean water management

Monitor drinking-water quality

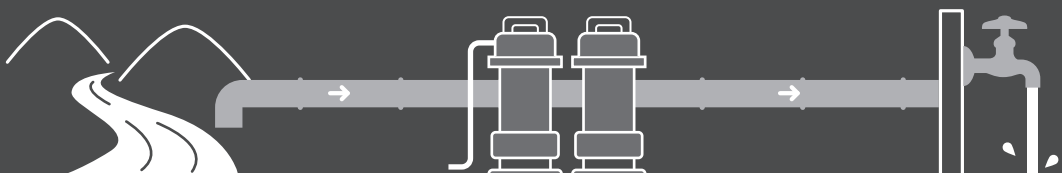

Accurate and Stable measurement

- Equipped with condensation prevention function
- Built-in deforming tank to remove air bubbles


Low maintenance cost

- No need to use or replace dehumidifier
- Employing a long-life light source

Water and dust resistance

- High waterproof and dustproof structure to various installation sites

Dimensions

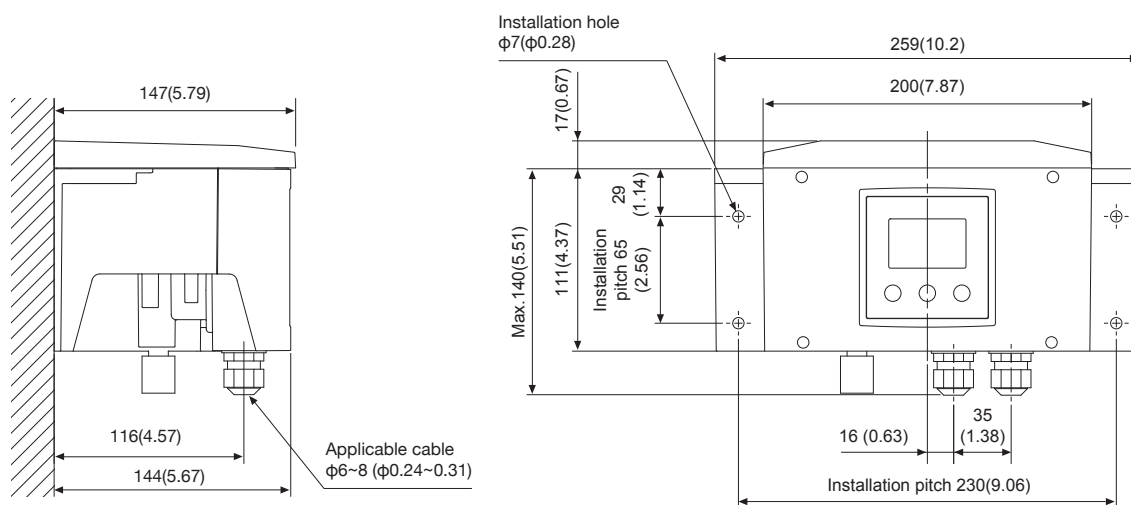

mm(in)

Specifications

Ultra Low Turbidity Checker	
Model No.	TC-Mi
Measuring method	Nephelometric 90° scattered light
Light source	LED
Measuring range	0.0001 – 100.00 (NTU/FNU) 0.0010 – 20.000 (deg.: polystyrene standard solution)
Display	LCD monitor
Display resolution	0.0001 – 9.9999NTU: 0.0001NTU 10.000 – 100.00NTU: 0.001NTU
Source voltage	24 VDC ±10%
Consumption current	Normal time: 100 mA or less Startup time: 600 mA or less
Digital communication	MODBUS (RS485) TC-Mi protocol (RS485)
Analog output	Signal output (analog 4 – 20 mA, resistance load 300 ohm or less) Self-checking output (open collector)
Measuring water flow rate	100 – 200 mL / min
Measuring water temperature	0 to 40°C (No freezing)
Operating temperature	-20 to +50°C humidity 95%RH or less
Main materials	PP-GF AES SUS316L
Dimension	Approx. 157 (H) x 259 (W) x 147 (D) mm
Weight	Approx. 2 kg
Protective construction	IP65
Option	TC-Mi-FL (Flowmeter)

Note: Specifications and design are subject to change without prior notice.

OPTEX PINNACLE INDIA PVT. LTD.

FF-11, 1st Floor, Paras Downtown Center, Golf Course Road,
Sector - 53, Gurgaon, Haryana - 122 002, India
Tel: +91-124-4035708, Mob. +91-9899 701 401
Email: p-verma@optex.in
www.optex.co.jp/e/

OPTEX CO., LTD.

5-8-12 Ogoto Otsu Shiga 520-0101 Japan
Tel.+81-77-579-8680 Fax.+81-77-579-8199
www.optex.co.jp/e/

Copyright (C) 2018 OPTEX CO., LTD.

76053-00-15747-1908