


## SPARTAN LED

### Zone 2/22 SPZ Infra-Red Floodlight



#### Robust and Durable

Designed from marine grade aluminium and able to withstand the most extreme environments.



#### Emergency

Available as an emergency variant, and capable of providing up to 100% light output in emergency mode.



#### Easy Maintenance

Featuring a unique modular design, key components such as the LED and PSU modules are easily accessible for straightforward maintenance and inspection.



#### Outstanding Distances

The high-power LEDs deliver up to 487m (1,596ft) of Infra-Red illumination, designed to enhance the performance of any video surveillance system at night.

## 5 YEAR WARRANTY

All Raytec luminaires are provided with an industry leading 5 year warranty and have an expected useful life in excess of 10 years. See Warranty Statement for details.



# Technical Specifications


Certification				
ATEX Rating	ATEX, UKCA and IEC Ex rated for Gas and Dust			
Hazardous Area Rating	Zone 2 – Gas and Dust			
Certificates	CML17ATEX4231, IEC Ex CML 17.0135 & CML 21UKEX4106			
Gas	II 3 G D Ex ec mc IIC T4 Gc Ta= Up to -50°C to +55°C (all emergency variants have a lower ambient of -20°C only)			
Dust	Ex tc IIC T82°C Dc Ta= Up to -50°C to +55°C IP66/IP67			
ABS Certificate #	ABS Certificate # 23-2432337-PDA			
Electrical				
	FL24	FL24-EM	FL48	FL48-EM
Input	110-254V 50/60Hz AC only Low voltage: 18-48V AC and 18-69V DC	110-254V 50/60Hz AC only	110-254V 50/60Hz AC only Low voltage: 18-48V AC and 18-69V DC	110-254V 50/60Hz AC only
Power	68W	71W	136W	139W
Termination	Incoming terminal block suitable for looping 4 core 4mm <sup>2</sup> cable (6mm <sup>2</sup> available - POA)			
Power Factor	>0.95			
Cable Entries	2xM20 as standard (other entries available upon request), dispatched complete with one ATEX/IEC Ex approved blanking plug			
Optical				
	FL24	FL24-EM	FL48	FL48-EM
Beam Patterns - Circular	10°x 10° or 30°x 30° or 50°x 50° or 120°x 120°			
Beam Patterns - Elliptical	35°x 10° or 60°x 25° or 80°x 30° or 120°x 50° (VARIO)			
LED type	Platinum Elite SMT LEDs			
Number of LEDs	24		48	
Wavelength	850nm			
Mechanical				
	FL24	FL24-EM	FL48	FL48-EM
Burning Position	Universal			
IP Rating	IP66/IP67			
Temperature Range	- 50°C to +55°C (- 58°F to +131°F)	- 20°C to +55°C (- 4°F to +131°F)	- 50°C to +55°C (- 58°F to +131°F)	- 20°C to +55°C (- 4°F to +131°F)
Weight	8kg (17.6lbs)	10kg (22lbs)	16kg (35.3lbs)	20kg (44lbs)
Enclosure	Marine grade aluminium epoxy powder coated, toughened glass, all external fasteners and brackets are marine grade stainless steel			
Unit Colour	Silver (RAL 9006)	Silver (RAL 9006) Red (RAL3024) - Emergency Cover	Silver (RAL 9006)	Silver (RAL 9006) Red (RAL3024) - Emergency Cover
Installation instructions	Please see document 0910-D-00027 at <a href="http://www.raytecl.com">www.raytecl.com</a>			
Battery care instructions	Please see document 0010-D-00001 at <a href="http://www.raytecl.com">www.raytecl.com</a>			
Dimensions	291 x 312 x 150mm (11.5 x 12.3 x 6")	291 x 312 x 215mm (11.5 x 12.3 x 8.5")	291 x 502 x 158mm (11.5 x 19.8 x 6.2")	291 x 502 x 219mm (11.5 x 19.8 x 8.6")
Mounting	U bracket (as shown on next page).			

## Technical Specifications - Continued


Emergency	FL24-EM	FL48-EM
Emergency Duration	90mins at 50% power Other options available	90mins at 25% power Other options available
Emergency Battery		Ni/Cd 12V 4.5Ah
Emergency Charge Time		20 hours
Part Codes	Circular Beam Patterns	Distances
FL48	SPARTAN Flood, 48 LED, Infra-Red, 10°x 10° beam	487m (1596ft) at 10°
	SPARTAN Flood, 48 LED, Infra-Red, 30°x 30° beam	191m (626ft) at 30°
	SPARTAN Flood, 48 LED, Infra-Red, 50°x 50° beam	170m (557ft) at 50°
	SPARTAN Flood, 48 LED, Infra-Red, 120°x 120° beam	53m (174ft) at 120°
FL24	SPARTAN Flood, 24 LED, Infra-Red, 10°x 10° beam	345m (1130ft) at 10°
	SPARTAN Flood, 24 LED, Infra-Red, 30°x 30° beam	138m (452ft) at 30°
	SPARTAN Flood, 24 LED, Infra-Red, 50°x 50° beam	117m (383ft) at 50°
	SPARTAN Flood, 24 LED, Infra-Red, 120°x 120° beam	32m (105ft) at 120°
Elliptical Beam Patterns	Distances	
FL48	SPARTAN Flood, 48 LED, Infra-Red, 35°x 10° beam	238m (779ft) at 10°
	SPARTAN Flood, 48 LED, Infra-Red, 60°x 25° beam	170m (557ft) at 30°
	SPARTAN Flood, 48 LED, Infra-Red, 80°x 30° beam	110m (359ft) at 50°
	SPARTAN Flood, 48 LED, Infra-Red 120°x 50° beam	74m (240ft) at 120°
FL24	SPARTAN Flood, 24 LED, Infra-Red, 35°x 10° beam	168m (550ft) at 10°
	SPARTAN Flood, 24 LED, Infra-Red, 60°x 25° beam	120m (393ft) at 30°
	SPARTAN Flood, 24 LED, Infra-Red, 80°x 30° beam	78m (254ft) at 50°
	SPARTAN Flood, 24 LED, Infra-Red, 120°x 50° beam	52m (171ft) at 120°

## Product Dimensions


FL24

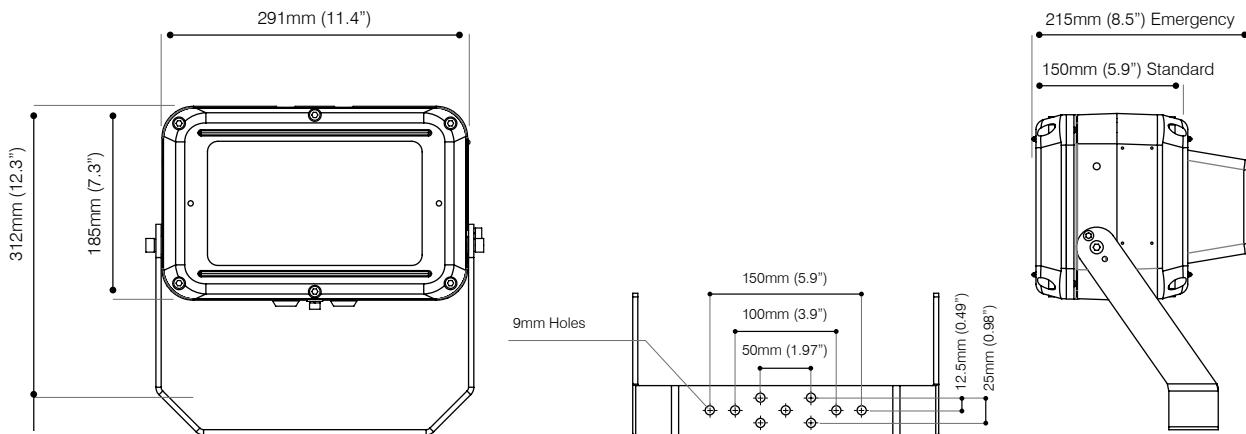


FL48

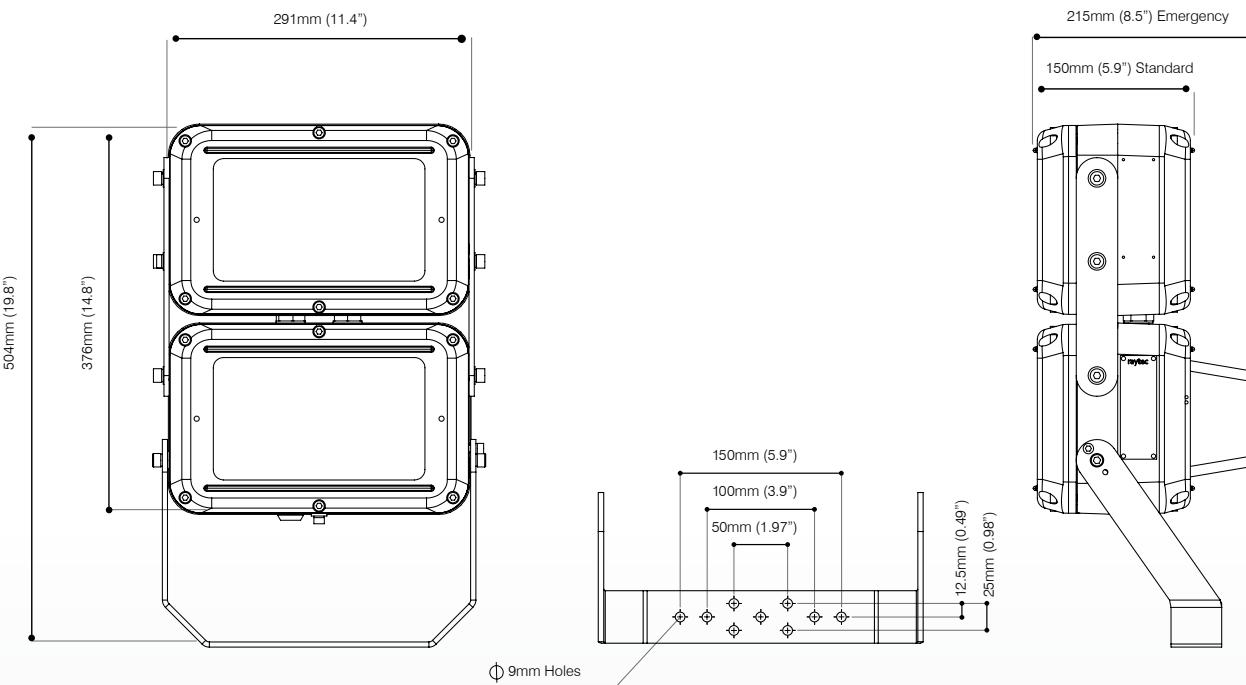

## Beam patterns - Circular

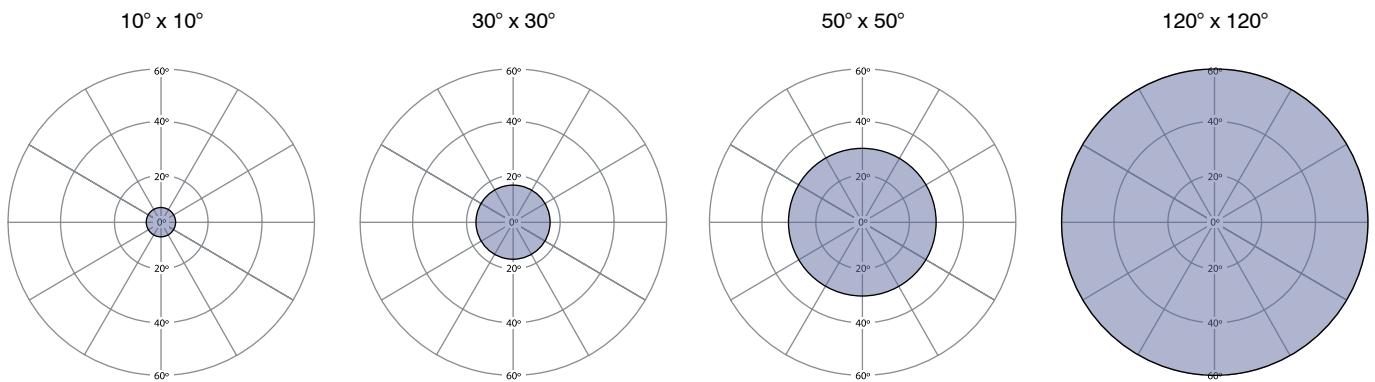

## Beam patterns – Elliptical (VARIO)

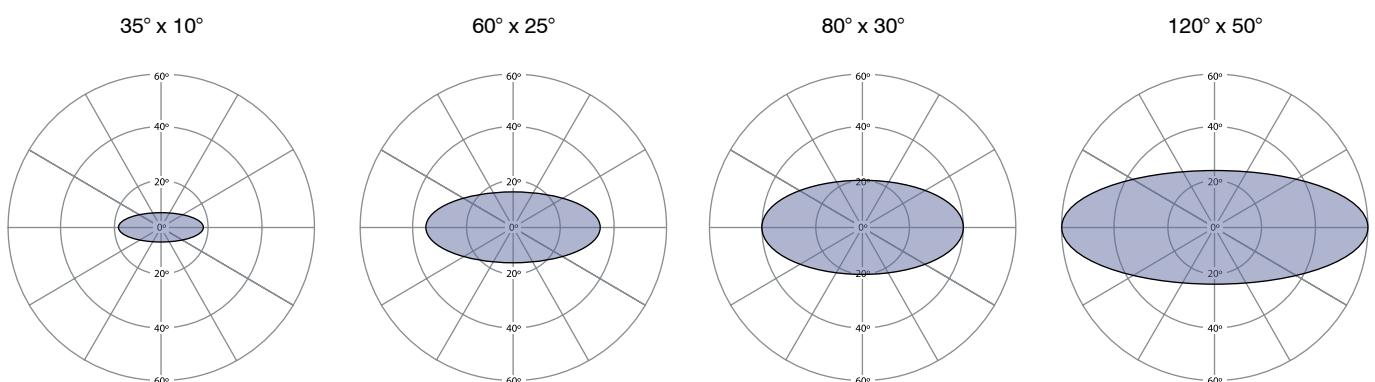

# Part Code Builder


## Zone 2

Example - SPZ-FL24-I-1010-EM25

Family	Model	Light Type	Optic	Emergency	Power	Entry
SPZ	FL24	I - Infra-Red	1010	Not Stated - Non Em	Not Stated - Standard Mains	Not Stated - M20
	FL48		3030	EM25 (FL48)	LV - Low Voltage (Non EM only)	M25
			5050	EM50 (FL24)		
			120120			
			3510			
			6025			
			8030			
			12050			

Other options available, contact Raytec.

## Products in the SPARTAN Family

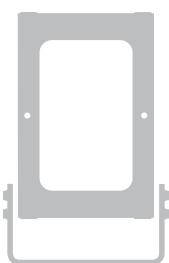


SPARTAN Flood



SPARTAN Linear



SPARTAN Bulkhead



SPARTAN Crane

## Disclaimer

The information provided in this document was accurate at the time of its creation. However, due to the evolving nature of our products and continuous improvements, there may be changes or updates that occur after its publication. For the most current and detailed information about our products, please contact our sales team at [sales@raytecl.com](mailto:sales@raytecl.com).